


(H)±0.15
The H is for reference only. Please be subject to the actual products.

Curve Chart(Be Confined To TEC2-102062030):

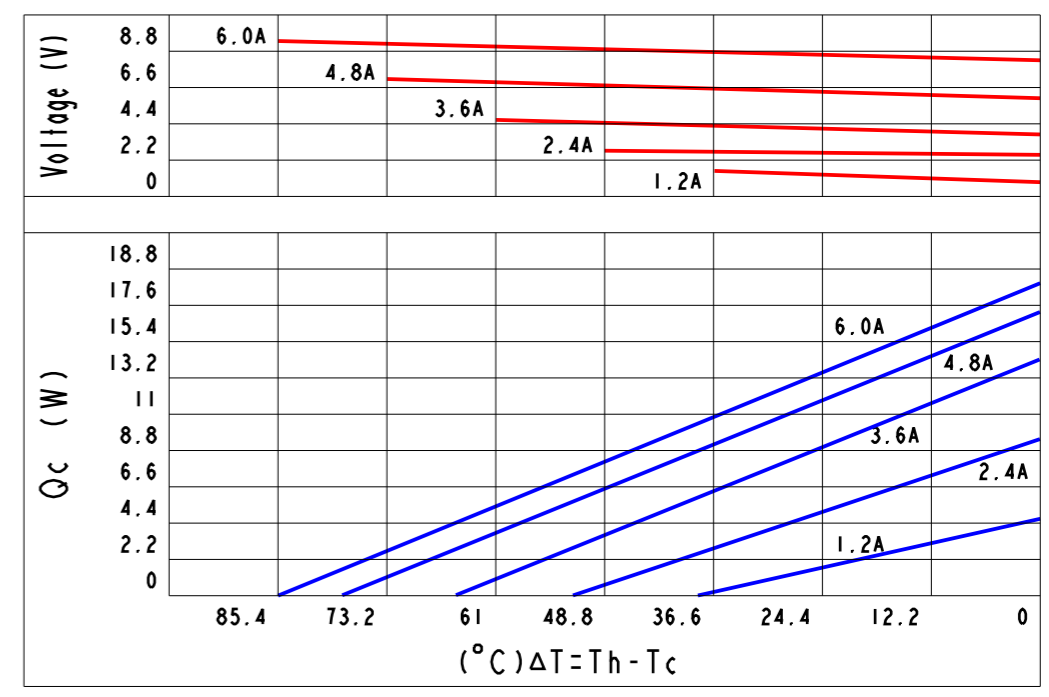

Part Number And Feature:

T	E	C	2	-	1	0	2	x	x	2	0	3	0	Sealing	NO
↓	↓				↓		↓	↓	↓	↓				Operation Temperature	125°C(Max.)
Thermo	Electric	Chip	Stage	Stack	N & P	Stack	Quantity	Current	A(Max.)	Dimension	(A)	Dimension	(B)	Melting Point	138°C
														Storage Temperature	-60°C~100°C
														RoHS	YES

Technical Data:

ITEM	Part NO.	Stack(P&N)	A(Max.)	V(Max.)	Qc(W) /Th=27°C/ ΔT(°C)	DIM(A)	DIM(B)	DIM(H)
1	TEC2-102022030	102	2 A	8.7 V	5.4W	85°C	S20	S30 RF7.7
2	TEC2-102042030	102	4 A	8.7 V	13W	85°C	S20	S30 RF6.9
3	TEC2-102062030	102	6 A	8.7 V	19W	85°C	S20	S30 RF6.2

- Notes:
1. Printing always on cold side.
 2. Torlerance of thermo and electric parameters ±10%.
 3. Please mount heat sink before you use it. also, please do not exceed the extra voltage at any time.
 4. Please contact with us if you need Melting Point 183°C (Operation Temperature 150°C Max.).

*DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPR ODUCE
USED OR DISCLOSED OR IN PART TO ANYONE WITHOUT THE PERMISSION OF KJLP (SHENZHEN) ELECTRONICS
CO., LTD.

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE MM
2 TOLERANCE ARE AS FOLLOWS:
0 < X < 2 ± 0.06
2 < X < 10 ± 0.08
10 < X < 50 ± 0.12
50 < X < 100 ± 0.16
100 < X < 200 ± 0.20
200 < X < 300 ± 0.30
ANGLES ± 0.5°

PART No.	TEC2-102xx2030	DESCRIPTION	DC 8.7V(Max.), 2~6A(Max.), 102 P&N, S20*S30mm
SIGNATURCE	DATE	昆晶冷片(深圳)电子有限公司	
DRAWN BY Gary	2013/09/09	KJLP (SHENZHEN)ELECTRONICS CO., LTD	
CHECKED BY Justin	2013/09/09	email: kjlp@kjlp.net http:// www.kjlp.net	
ENGR Vivi	2013/09/09	Tel: +86-755-82528352 Fax: +86-755-22639899	
APPROVED BY Mason	2013/09/09	CAD MODLE: TEC2-102xx2030.prt	SCALE: 1:1 REV: A
ISSUED BY Jack	2013/09/09	CAD DWG: TEC2-102xx2030.drw	SIZE: A3 SHEET: 1 OF 1