

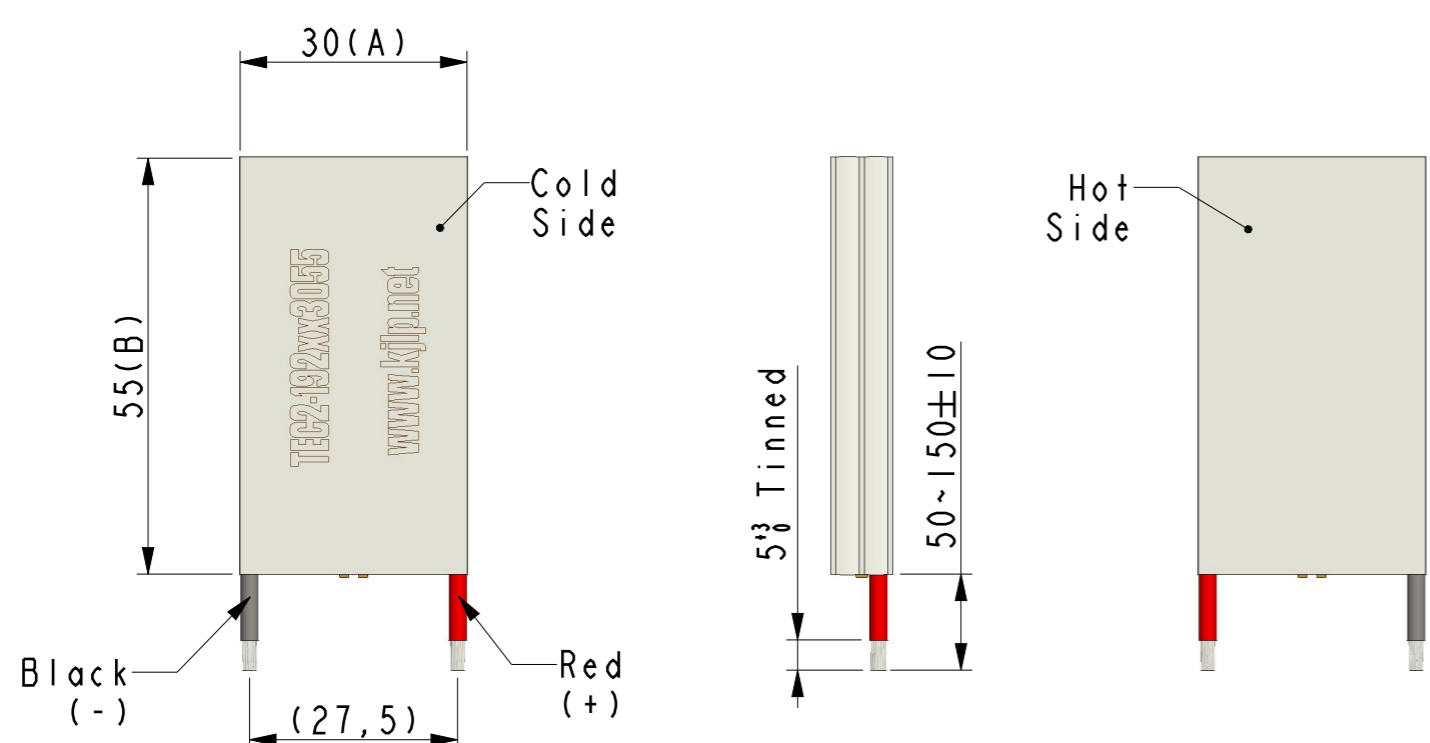


REVISIONS					
REV.	POS.	DESCRIPTION	DATE	DRW	APP
A		INITIAL CREATION	2013/09/09	Gory	Mason

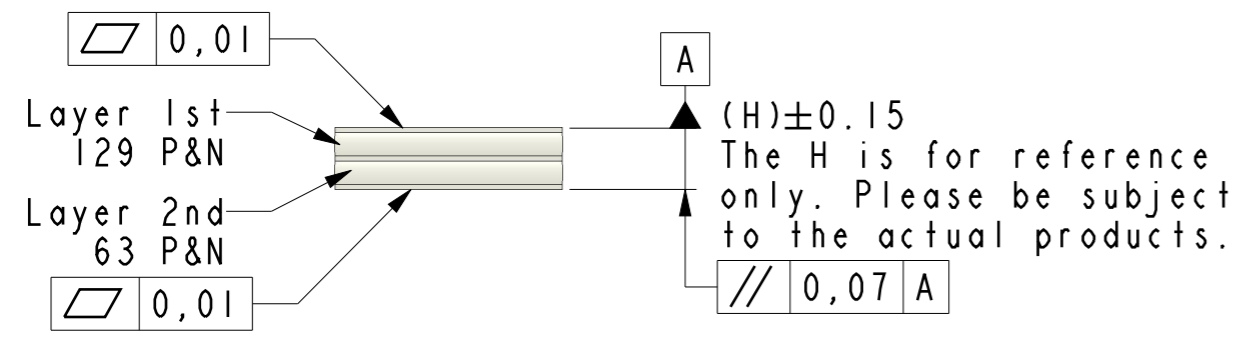

Curve Chart(Be Confined To TEC2-192023055):

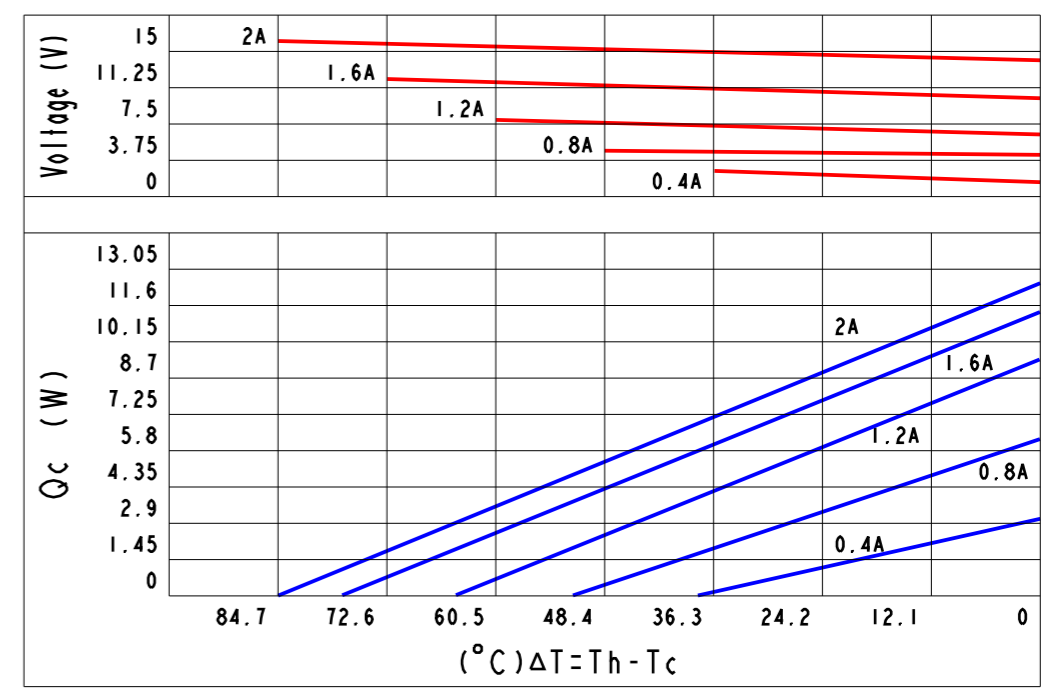

Part Number And Feature:

T	E	C	2	-	1	9	2	x	x	3	0	5	5	Sealing	YES
↓	↓	↓	↓		↓	↓	↓	↓	↓	↓	↓	↓	↓	Operation Temperature	125°C(Max.)
Thermo	Electric	Chip	Stage	Stack	N & P	Stack	Quantity	Current	A(Max.)	Dimension	(A)	Dimension	(B)	Melting Point	138°C
														Storage Temperature	-60°C~100°C
														RoHS	YES


Technical Data:

ITEM	Part NO.	Stack(P&N)	A(Max.)	V(Max.)	Qc(W) /Th=27°C/ ΔT(°C)	DIM(A)	DIM(B)	DIM(H)
1	TEC2-192023055	192	2 A	15 V	13W	85°C	30	55

- Notes:
1. Printing always on cold side.
  2. Torlerance of thermo and electric parameters ±10%.
  3. Please mount heat sink before you use it. also, please do not exceed the extra voltage at any time.
  4. Please contact with us if you need Melting Point 183°C (Operation Temperature 150°C Max.).

\*DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION



THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPR ODUCE  
USED OR DISCLOSED OR IN PART TO ANYONE WITHOUT THE PERMISSION OF KJLP (SHENZHEN) ELECTRONICS  
CO., LTD.

1. UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE MM  
2 TOLERANCE ARE AS FOLLOWS:  
0 < X < 2 ± 0.06  
2 < X < 10 ± 0.08  
10 < X < 50 ± 0.12  
50 < X < 100 ± 0.16  
100 < X < 200 ± 0.20  
200 < X < 300 ± 0.30  
ANGLES ± 0.5°

PART No.	TEC2-192xx3055	DESCRIPTION	DC 15V(Max.),2A(Max.),192 P&N,30*55mm
SIGNATURCE	DATE	昆晶冷片(深圳)电子有限公司	
DRAWN BY	Gory	2013/09/09	KJLP (SHENZHEN)ELECTRONICS CO., LTD
CHECKED BY	Justin	2013/09/09	email: kjlp@kjlp.net http:// www.kjlp.net
ENGR	Vivi	2013/09/09	Tel: +86-755-82528352 Fax: +86-755-22639899
APPROVED BY	Mason	2013/09/09	CAD MODLE: TEC2-192xx3055.prt
ISSUED BY	Jack	2013/09/09	CAD DWG: TEC2-192xx3055.drw
MATERIAL:			SCALE: 1:1 REV: A
			SIZE: A3 SHEET: 1 OF 1