


(H)±0.25
The H is for reference only. Please be subject to the actual products.

Curve Chart(Be Confined To TEC4-246061540):

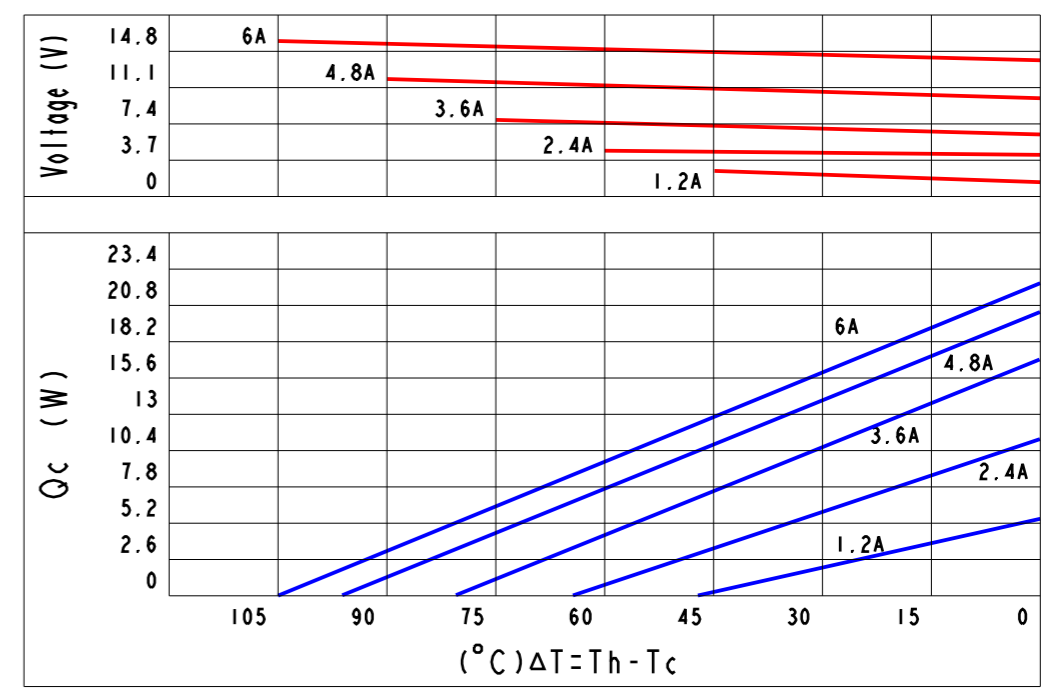

Part Number And Feature:

T	E	C	4	-	2	4	6	x	x	1	5	4	0	Sealing	NO
↓	↓				↓			↓		↓			↓	Operation Temperature	125°C(Max.)
Thermo	Electric	Chip	Stage	Stack	N & P	Stack	Quantity	Current	A(Max.)	Dimension	(A)	Dimension	(B)	Melting Point	138°C
														Storage Temperature	-60°C~100°C
														RoHS	YES

Technical Data:


ITEM	Part NO.	Stack(P&N)	A(Max.)	V(Max.)	Qc(W) /Th=27°C/ ΔT(°C)	DIM(A)	DIM(B)	DIM(H)
1	TEC4-246031540	246	3 A	14.8 V	14W	105°C	S15	S40 RF13.7
2	TEC4-246041540	246	4 A	14.8 V	18W	105°C	S15	S40 RF13.5
3	TEC4-246061540	246	6 A	14.8 V	24W	105°C	S15	S40 RF11.8

Notes:

1. Printing always on cold side.
2. Tolerance of thermo and electric parameters ±10%.
3. Please mount heat sink before you use it. also, please do not exceed the extra voltage at any time.
4. Please contact with us if you need Melting Point 183°C (Operation Temperature 150°C Max.)


*DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION



THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPR ODUCE
USED OR DISCLOSED OR IN PART TO ANYONE WITHOUT THE PERMISSION OF KJLP (SHENZHEN) ELECTRONICS
CO., LTD.

1. UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE MM
2 TOLERANCE ARE AS FOLLOWS:
0 < X < 2 ± 0.06
2 < X < 10 ± 0.08
10 < X < 50 ± 0.12
50 < X < 100 ± 0.16
100 < X < 200 ± 0.20
200 < X < 300 ± 0.30
ANGLES ± 0.5°

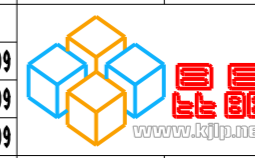PART No.	TEC4-246xx1540	DESCRIPTION	DC 14.8V(Max.), 3~6A(Max.), 246 P&N, S15*S40mm						
SIGNATURE		DATE	 昆晶冷片(深圳)电子有限公司 KJLP (SHENZHEN) ELECTRONICS CO., LTD email: kjlp@kjlp.net http:// www.kjlp.net Tel: +86-755-82528352 Fax: +86-755-22639899						
DRAWN BY	Gary	2013/09/09							
CHECKED BY	Justin	2013/09/09							
ENGR	Vivi	2013/09/09							
APPROVED BY	Mason	2013/09/09							
MATERIAL:	ISSUED BY	Jack	2013/09/09	CAD DWG:	TEC4-246xx1540.drw	SCALE:	1:1	REV:	A
				CAD MODLE:	TEC4-246xx1540.prt	SIZE:	A3	SHEET:	1 OF 1