


REVISIONS					
REV.	POS.	DESCRIPTION	DATE	DRW	APP
A		INITIAL CREATION	2022/07/01	Gory	Mason

Curve Chart(Be Confined To TE01-140053995):

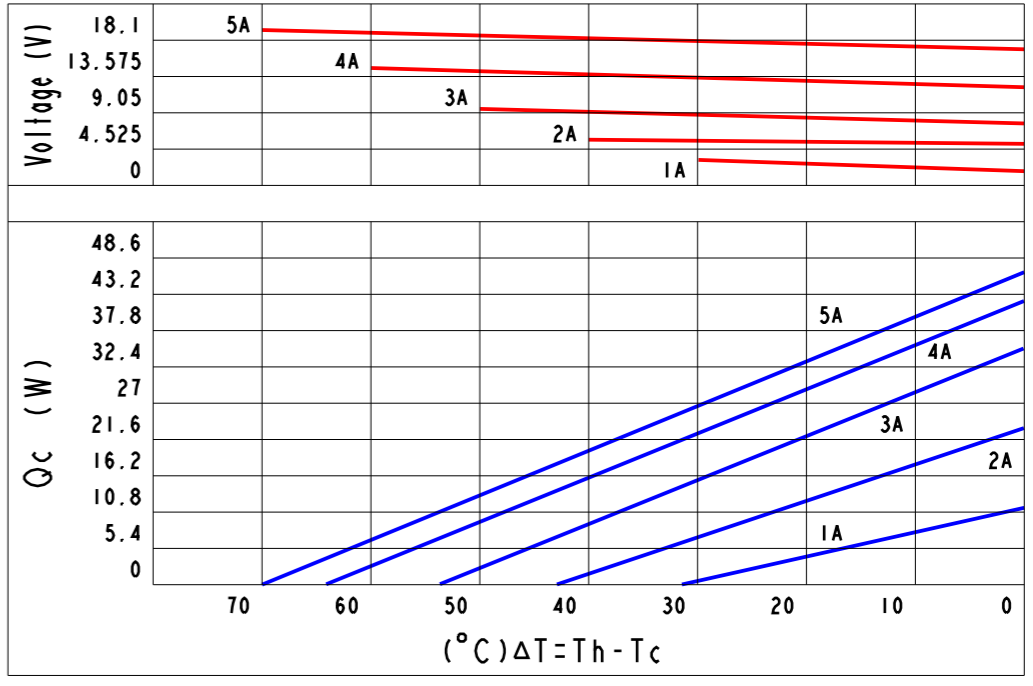

Part Number And Feature:

T	E	O	I	-	I	4	0	x	x	3	9	9	5	Sealing	YES
↓	↓				↓	↓	↓	↓	↓	↓	↓	↓	↓	Operation Temperature	125°C(Max.)
Thermo	Electric	Chip(O Type)	Stage	Stack	N & P	Stack	Quantity	Current	A(Max.)	Dimension	(A)	Dimension	(B)	Melting Point	138°C
														Storage Temperature	-60°C~100°C
														RoHS	YES


Technical Data:

ITEM	Part NO.	Stack(P&N)	A(Max.)	V(Max.)	Qc(W) /Th=27°C/ ΔT(°C)	DIM(A)	DIM(B)	DIM(H)
I	TE01-140053995	140	5 A	18.1 V	48.3W	70°C	Ø39	Ø9.5

Notes:

1. Printing always on cold side.
2. Tolerance of thermo and electric parameters ±10%.
3. Please mount heat sink before you use it. also, please do not exceed the extra voltage at any time.
4. Please contact with us if you need Melting Point 183°C (Operation Temperature 150°C Max.) and 235°C (Operation Temperature 200°C Max.) type.

*DO NOT SCALE DRAWING

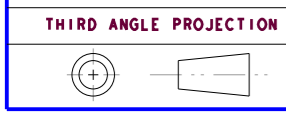

THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPR ODUCE
USED OR DISCLOSED OR IN PART TO ANYONE WITHOUT THE PERMISSION OF KJLP (SHENZHEN) ELECTRONICS
CO., LTD.

1. UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE MM
2 TOLERANCE ARE AS FOLLOWS:
0 < X < 2 ± 0.06
2 < X < 10 ± 0.08
10 < X < 50 ± 0.12
50 < X < 100 ± 0.16
100 < X < 200 ± 0.20
200 < X < 300 ± 0.30
ANGLES ± 0.5°

PART No.	TE01-140xx9539	DESCRIPTION	DC 18.1V(Max.), 5A(Max.), 140 P&N, Ø39*Ø9.5mm
SIGNATURE	DATE	昆晶冷片(深圳)电子有限公司	
DRAWN BY	Gory	2022/07/01	KJLP (SHENZHEN) ELECTRONICS CO., LTD
CHECKED BY	Justin	2022/07/01	email: kjlp@kjlp.net http://www.kjlp.net
ENGR	Vivi	2022/07/01	Tel: +86-755-82528352 Fax: +86-755-22639899
APPROVED BY	Mason	2022/07/01	CAD MODLE: TE01-140xx9539.prt
ISSUED BY	Jack	2022/07/01	CAD DWG: TE01-140xx9539.drw
MATERIAL:			SCALE: 1:1 REV: A
			SIZE: A3 SHEET: 1 OF 1