


Curve Chart(Be Confined To TEC2-192023055):

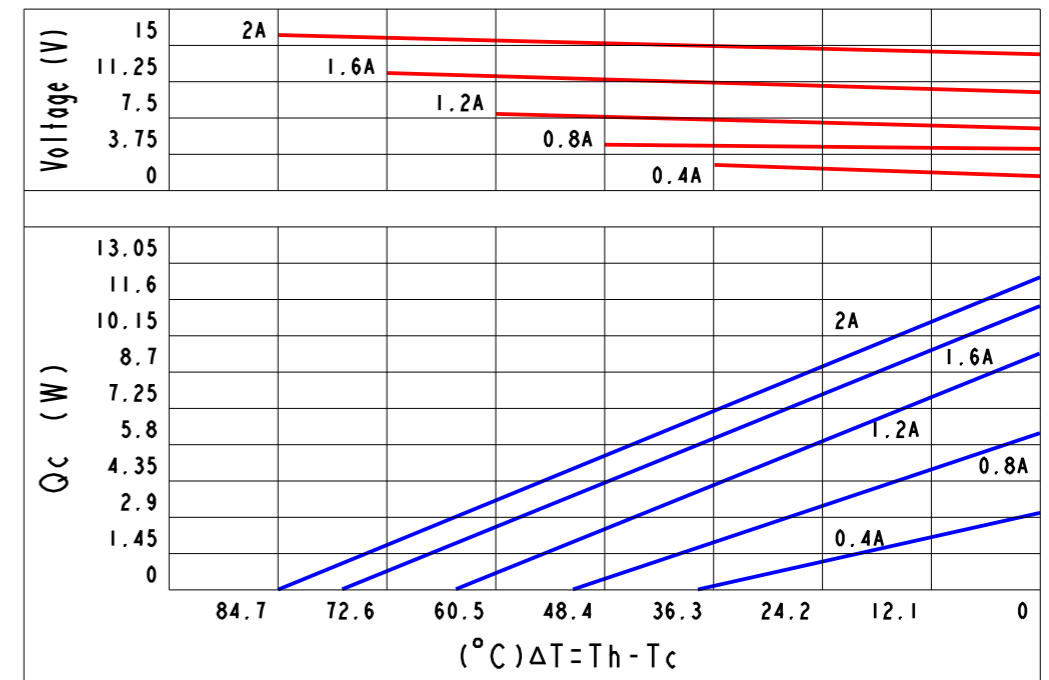

Part Number And Feature:

T	E	C	2	-	1	9	2	x	x	3	0	5	5	Sealing	YES
↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	Operation Temperature	125°C(Max.)
Thermo	Electric	Chip	Stage	Stack	N & P	Stack	Quantity	Current	A(Max.)	Dimension	(A)	Dimension	(B)	Melting Point	138°C
														Storage Temperature	-60°C~100°C
														RoHS	YES

Technical Data:


ITEM	Part NO.	Stack(P&N)	A(Max.)	V(Max.)	Qc(W) /Th=27°C/ ΔT(°C)	DIM(A)	DIM(B)	DIM(H)
1	TEC2-192023055	192	2 A	15 V	13W 85°C	30	55	RF8.1

Notes:

1. Printing always on cold side.
2. Torlerance of thermo and electric parameters ±10%.
3. Please mount heat sink before you use it. also, please do not exceed the extra voltage at any time.
4. Please contact with us if you need Melting Point 183°C (Operation Temperature 150°C Max.).

\*DO NOT SCALE DRAWING


THIRD ANGLE PROJECTION



THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPR ODUCE  
USED OR DISCLOSED OR IN PART TO ANYONE WITHOUT THE PERMISSION OF KJLP (SHENZHEN) ELECTRONICS  
CO., LTD.

1. UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE MM  
2 TOLERANCE ARE AS FOLLOWS:  
0 < X < 2 ± 0.06  
2 < X < 10 ± 0.08  
10 < X < 50 ± 0.12  
50 < X < 100 ± 0.16  
100 < X < 200 ± 0.20  
200 < X < 300 ± 0.30  
ANGLES ± 0.5°

MATERIAL:

PART No.	TEC2-192xx3055	DESCRIPTION	DC 15V(Max.),2A(Max.),192 P&N,30*55mm				
SIGNATURCE	DATE	 昆晶冷片(深圳)电子有限公司 KJLP(SHENZHEN)ELECTRONICS CO., LTD email: kjlp@kjlp.net http:// www.kjlp.net Tel: +86-755-82528352 Fax: +86-755-22639899					
DRAWN BY	Gary 2013/09/09						
CHECKED BY	Justin 2013/09/09						
ENGR	Vivi 2013/09/09						
APPROVED BY	Mason 2013/09/09						
ISSUED BY	Jack 2013/09/09	CAD MODLE:	TEC2-192xx3055.prt	SCALE:	1:1	REV:	A
		CAD DWG:	TEC2-192xx3055.drw	SIZE:	A3	SHEET:	1 OF 1