


\*DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION

THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPR ODUCE  
USED OR DISCLOSED OR IN PART TO ANYONE WITHOUT THE PERMISSION OF KJLP (SHENZHEN) ELECTRONICS  
CO., LTD.

REVISIONS					
REV.	POS.	DESCRIPTION	DATE	DRW	APP
A		INITIAL CREATION	2013/09/09	Gory	Mason

Curve Chart(Be Confined To TECI-031021212):

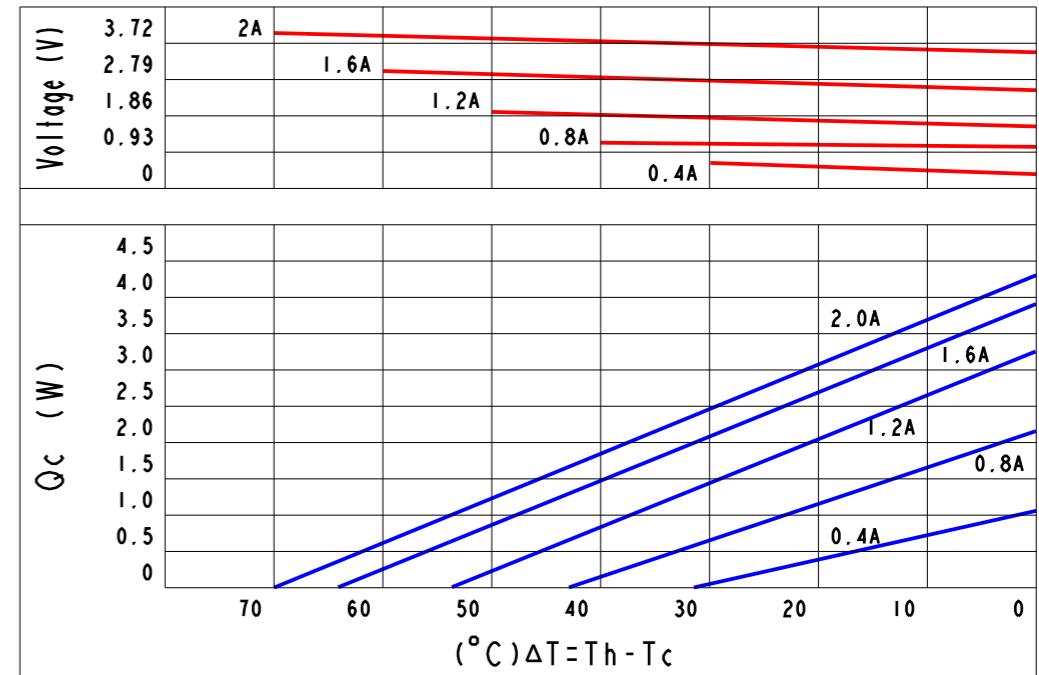

Part Number And Feature:


T	E	C	I	-	0	3	1	x	x	1	2	1	2	Sealing	YES
↓	↓				↓	↓	↓	↓	↓	↓	↓	↓	↓	Operation Temperature	125°C(Max.)
Thermo	Electric	Chip	Stage	N & P	Stack	Quantity	Current	A(Max.)	Dimension	(A)	Dimension	(B)	Melting Point	138°C	
													Storage Temperature	-60°C~100°C	
													RoHS	YES	

Technical Data:

ITEM	Part NO.	Stack(P&N)	A(Max.)	V(Max.)	Qc(W) /Th=27°C/ ΔT(°C)	DIM(A)	DIM(B)	DIM(H)
1	TECI-031011212	31	1 A	3.7 V	2.9W 70°C	12	12	RF3.5
2	TECI-031021212	31	2 A	3.7 V	4.4W 70°C	12	12	RF3.4

Notes:

1. Printing always on cold side.
2. Torlerance of thermo and electric parameters ±10%.
3. Please mount heat sink before you use it. also, please do not exceed the extra voltage at any time.
4. Please contact with us if you need Melting Point 183°C (Operation Temperature 150°C Max.) and 235°C (Operation Temperature 200°C Max.) type.

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE MM 2 TOLERANCE ARE AS FOLLOWS: 0 < X < 2 ± 0.06 2 < X < 10 ± 0.08 10 < X < 50 ± 0.12 50 < X < 100 ± 0.16 100 < X < 200 ± 0.20 200 < X < 300 ± 0.30 ANGLES ± 0.5°	PART No.	TECI-031xx1212	DESCRIPTION	DC 3.7V(Max.), 1~2A(Max.), 31 P&N, 12*12mm		
	SIGNATURE		DATE	 昆晶冷片(深圳)电子有限公司 KJLP (SHENZHEN) ELECTRONICS CO., LTD email: kjlp@kjlp.net http:// www.kjlp.net Tel: +86-755-82528352 Fax: +86-755-22639899		
	DRAWN BY	Gory	2013/09/09			
	CHECKED BY	Justin	2013/09/09			
ENGR	Vivi	2013/09/09				
APPROVED BY	Mason	2013/09/09	CAD MODLE:	TECI-031xx1212.prt	SCALE: 1:1	REV: A
MATERIAL:	ISSUED BY	Jack	2013/09/09	CAD DWG:	TECI-031xx1212.drw	SIZE: A3 SHEET: 1 OF 1